

Fine Braids

Plaited Polyester Cord



FEATURES/ BENEFITS

- Multi-purpose, textured feel 8 plait braid
- High abrasion resistant properties make it ideal for blinds
- UV stabilised
- Excellent knotting and untying properties
- Available in 3mm, 5mm, 6mm, 8mm, 10mm & 12mm diameters
- Black VB cord available in 3mm x 500m
- Also available in a variety of colours upon request

APPLICATIONS

- Blind draw cords (Venetians, Roman)
- Light tarpaulin

Smooth Polyester Cord




FEATURES/ BENEFITS

- 16 plait smooth braid, soft handling
- Highly resistant to stretch and abrasion
- UV stabilised
- Excellent knotting and untying properties
- Available in 2mm, 2.5mm, 3mm, 4mm & 5mm diameters

APPLICATIONS

- Whipping Cord
- Tarpaulins
- Tying Lashing
- Flag poles
- Lacing Cord

Polyester Starter Cord

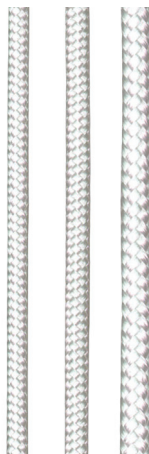


FEATURES/ BENEFITS

- Strong, durable, low stretch, high tenacity cord
- Maximum abrasion resistance
- Can be pulled quickly without kinks, rotations or twists
- UV stabilised
- Stable shape and wide surface area, runs freely through eyelets
- Available in 3.5mm, 4mm, 4.5mm & 5mm diameters to suit all leading equipment starter mechanisms

APPLICATIONS

- Starter motors
- Tarpaulins
- Combustion engines
- Heavier blinds

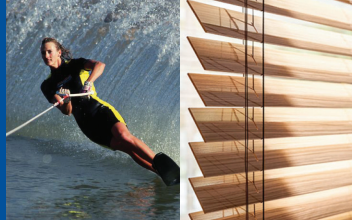

RANGE/TECHNICAL

Product Code	Description	Weight Kg	Breaking Kn	Force Kg	UOM
16 PLAIT SMOOTH POLYESTER CORD NATURAL					
RBRS0208	Synthetic Braid 2mm x 100m	0.4	1.0	110	Reel
RBRS0210M*	Synthetic Braid 2mm x 300m	1.1	1.0	110	Reel
RBRS0214	Synthetic Braid 2.5mm x 100m	0.7	1.4	150	Reel
RBRS0258M*	Synthetic Braid 2.5mm x 300m	2.1	1.4	150	Reel
RBRS0312	Synthetic Braid 3mm x 100m	0.8	2.1	220	Reel
RBRS0313M	Synthetic Braid 3mm x 300m	2.4	2.1	220	Reel
RBRS0410	Synthetic Braid 4mm x 100m	1.7	3.4	350	Reel
RBRS0411M	Synthetic Braid 4mm x 300m	4.9	3.4	350	Reel
RBRS0505	Synthetic Braid 5mm x 100m	2.1	5.0	520	Reel
8 PLAIT TEXTURED POLYESTER CORD NATURAL					
RBRO0318	Polyester VB Cord 3mm x 500m Black	3.7	1.9	200	Reel
RBRS0331	Synthetic Braid Textured 3mm x 500m White	3.2	2.1	220	Reel
RBRS0504*	Synthetic Braid Textured 5mm x 250m White	8.2	5.0	520	Reel
RBRS0606	Synthetic Braid Textured 6mm x 250m White	3.7	5.8	600	Reel
RBRS0880	Synthetic Braid Textured 8mm x 200m White	9.5	11.2	1150	Reel
RBRS1005	Synthetic Braid Textured 10mm x 250m White	10.7	15.6	1600	Reel
RBRS1209*	Synthetic Braid Textured 12mm x 80m White	9.0	21.5	2200	Reel
16 PLAIT SMOOTH POLYESTER STARTER CORD NATURAL					
RBRS0352	Synthetic Start Cord 3.5mm x 100m R3161	1.2	2.3	240	Reel
RBRS0417	Synthetic Start Cord 4mm x 100m R3026	1.7	2.9	300	Reel
RBRS0449	Synthetic Start Cord 4.5mm x 100m	1.9	4.1	420	Reel
RBRS0509	Synthetic Start Cord 5mm x 100m R3240	2.7	4.9	500	Reel

* Made to order - minimum order quantity and lead time applies

FIBRE CHARACTERISTICS

Fibre type	Description	Specific gravity	Sensitive to	Resistant to	Heat reaction	Strength and elongation
Polyester	Continuous Filament	1.38	Alkalis, Phenolic Compounds, Sulfuric Acid.	Most Organic and Mineral Acids, Solvents, Bleaches and Oxidizing Agents.	Softens 228°C, Melts 255°C.	Equivalent wet/ dry strength ratio. Elongation 35% at Break.