




Flexline12

12 Strand Polyester Docking Braid

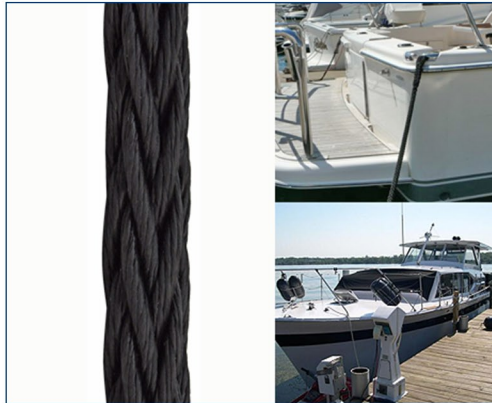

FEATURES

- Equivalent wet/dry strength, does not shrink
- Exclusive look on this classy Dockline
- Hollow 12 strand construction, highly efficient and simple to splice
- Soft feel, torque and kink resistant
- Protective coating for abrasion resistance
- UV resistant

RANGE/TECHNICAL

- 8mm - 32mm in 220m coils
- Black colour
- Made to order

Product Code	Size (mm)	Weight per Coil	Coil Length	BreakForce (kg)
BRY080BR	8mm	12 kg	220m	1595
BRY100BR	10mm	18 kg	220m	2520
BRY120BR	12mm	26 kg	220m	3795
BRY140BR	14mm	35 kg	220m	4840
BRY160BR	16mm	46 kg	220m	6660
BRY180BR	18mm	58 kg	220m	7700
BRY200BR	20mm	72 kg	220m	8140
BRY240BR	24mm	104 kg	220m	13750
BRY280BR	28mm	141 kg	220m	18150
BRY320BR	32mm	162 kg	220m	22880

Note: In relaxed state, these braids physically measure approx 6/8mm larger than states. Made to order - lead time applies. Sizes up to 60mm available on request.

APPLICATIONS

- Mooring/Docking
- Anchor Warps
- Towing Lines
- Lanyards
- Fender Lines

FIBRE CHARACTERISTICS

Fibre:Type	Description	Specific Gravity	Sensitive to	Resistant to	Heat Reaction	Strength & Elongation
Polyester	Continuous Filament	1.38	Alkalis, phenolic compounds, sulphuric acid	Most organic & mineral acids, organic solvents, bleaches & oxidising agents	Softens 228°C Melts 255°C	Equivalent wet/dry strength ratio. Elongation 35% at Break